





**CEILING TRACK HOISTS
MOBILE HOISTS
SLINGS**



SYMBOLS:
 Bulk/oversized item 
 Made to order (see P200) 

Tel: 0800 917 0399
www.chilterninvadex.co.uk

Fax: +44 (0) 1869 365588
sales@chilterninvadex.co.uk

OVERHEAD HOISTS

Explanation of Wispa overhead hoist options



Wispa 100 Series hoist

Maximum Load 130kg (20 stones) (286lb) Standard models

Maximum Load 190kg (29 stones) (418lb) Turbo models

- Up/down/traverse/X-Y options
- Battery or transformer models (transformer models have no battery to recharge) and are ideal for tracks up to 3 metres
- Battery models 60 lifts per charge (based on average 70kg patient weight)



Wispa 200 Series hoist

Maximum Load 200kg (31 stones) (440lb)

- Up/down/traverse/X-Y options
- Soft start/stop for added control during transfer
- Infra-red hand control options
- Up to 200 lifts per charge (based on average 70kg patient weight)
- Aesthetically designed

Wispa 300 Series hoist

Max Load 272kg (42 stones) (598lb)

- Increased maximum load - all other features as 200 Series hoist



WispaLite portable hoist

Maximum Load 200kg (31 stones) (440lb)

- Can be used in conjunction with the LiteTrack freestanding portable gantry or a fixed ceiling track installation
- Easily transferred from track to track between different room locations
- Easy to carry using Integral carry handle and with fold up arms
- Soft start/stop for added control during transfer
- Operated via controls on the hoist cover or from the handset

SYMBOLS:

Bulk/oversized item



Made to order (see P200)



Tel: 0800 917 0399

www.chilterninvadex.co.uk

Fax: +44 (0) 1869 365588

sales@chilterninvadex.co.uk

OVERHEAD HOISTS



Wispa 100 Series hoist range

Maximum Load 130kg (20 stones) (286lb) Standard models

Maximum Load 190kg (29 stones) (418lb) Turbo models

- Power options to suit
- Economical but simple to recharge
- Safe, controlled handling
- Emergency stop with reset facility
- Emergency lowering
- Lift motor has a self lock facility
- Tested to the durability section of British Standard 10535 with 10 thousand lift and lower tests

Wispa 100 Series hoist range - Transformer powered models

| code | Powered lift | Powered traverse | 230V UK/EU | 110V N. America | 130kg max load | 190kg max load | Price |
|------------|--------------|------------------|------------|-----------------|----------------|----------------|-------|
| OHWCBEU | ● | | ● | | ● | | £825 |
| OHWLCBEU | ● | ● | ● | | ● | | £1035 |
| OHWLCBUS | ● | ● | | ● | ● | | £1009 |
| OHWTCBEU | ● | | ● | | | ● | £856 |
| OHWTCBUS | ● | | | ● | | ● | £856 |
| OHWLTCEU | ● | ● | ● | | | ● | £1061 |
| OHWLTCEBUS | ● | ● | | ● | | ● | £1061 |

*Installation Quotation subject to Site Survey. For details of Ceiling Track Options please contact your nearest Chiltern Invadex Office.

Models shown above are not suitable for use with Infra-red control, manual/powerd turntable, manual/powerd X-Y, manual or powerd X-Y to mono or points. If these options are required select a battery powered model from the list shown below.

Wispa 100 Series hoist range - Battery powered models

| code | Powered lift | Powered traverse | Auxiliary output 'X-Y' (cable) | Auxiliary output 'X-Y' (bullet) | 130kg max load | 190kg max load | Price |
|----------------|--------------|------------------|--------------------------------|---------------------------------|----------------|----------------|-------|
| OHWBCBEU | ● | | | | ● | | £846 |
| OHWLCBEU | ● | ● | | | ● | | £1061 |
| OHWLCBEUXY | ● | ● | ● | | ● | | £1112 |
| OHWLCBEUXY-M | ● | ● | | ● | ● | | £1112 |
| OHWTBCBEU | ● | | | | | ● | £907 |
| OHWLTBCBEU | ● | ● | | | | ● | £1102 |
| OHWLTBCBEUXY | ● | ● | ● | | | ● | £1153 |
| OHWLTBCBEUXY-M | ● | ● | | ● | | ● | £1153 |

Note: models listed are universal for use in all territories

Installation Quotation subject to Site Survey. For details of Ceiling Track Options please contact your nearest Chiltern Invadex Office.

Note: Auxiliary output bullets must be specified for intended use.

Wispa 100 Series hoist range configuration options

| code | Infra-red control | Manual turntable | Powered turntable | Manual X-Y | Powered X-Y | Powered X-Y to mono | Manual X-Y to mono | Points |
|----------------|-------------------|------------------|-------------------|------------|-------------|---------------------|--------------------|--------|
| OHWBCBEU | | ● | | ● | | | ● | |
| OHWLCBEU | | ● | | ● | | | ● | |
| OHWLCBEUXY | | | | | ● | | | |
| OHWLCBEUXY-M | | ● | ● | | ● | ● | ● | |
| OHWTBCBEU | | ● | | ● | | | ● | |
| OHWLTBCBEU | | ● | | ● | | | ● | |
| OHWLTBCBEUXY | | | | | ● | | | |
| OHWLTBCBEUXY-M | | ● | ● | | ● | ● | ● | |

SYMBOLS:

Bulk/oversized item



Made to order (see P200)



Tel: 0800 917 0399


www.chilterninvadex.co.uk

Fax: +44 (0) 1869 365588

sales@chilterninvadex.co.uk

OVERHEAD HOISTS

Wispa 100 Series hoist range Technical information

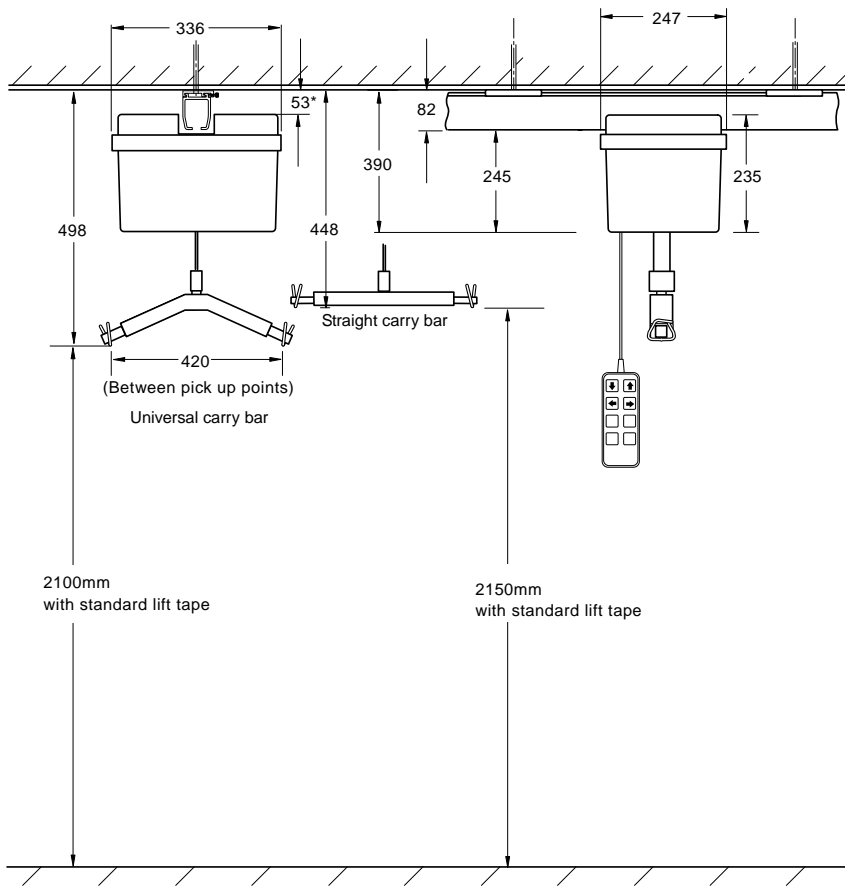

Notes:

- *103mm without the cover
- The 100 Series hoist carry bar can be lowered to a maximum of 2.1m. This is adjustable to suit site conditions
- The saving on head clearance for universal carry bar versus straight carry bar is 50mm
- Extended lifting tapes are available as an optional extra
- CAD Drawings of hoists available www.chilterninvadex.co.uk/architects
- Universal carry bar supplied as standard. A straight carry bar is available as an accessory.

SYMBOLS:

Bulk/oversized item



Made to order (see P200)



Tel: 0800 917 0399

www.chilterninvadex.co.uk

Fax: +44 (0) 1869 365588

sales@chilterninvadex.co.uk

OVERHEAD HOISTS



Wispa 200 Series hoist range Maximum Load 200kg (31 stones) (440lb)

- Controlled transfer from the bed, wheelchair or floor
- Simple recharge facility
- Dynamic yet safe
- Soft start/stop for smooth, controlled transfer
- Variable speed facility
- Tested to the durability section of British Standard 10535 with 10 thousand lift and lower tests

| code | Powered lift | Powered traverse | Auxiliary output 'X-Y' (cable) | Auxiliary output 'X-Y' (bullet) | Infra-red hand control | Price |
|-------------|--------------|------------------|--------------------------------|---------------------------------|------------------------|-----------|
| OH200L | ● | | | | | ●●● £1022 |
| OH200L-M | ● | | | ● | | ●●● £1022 |
| OH200LT | ● | ● | | | | ●●● £1180 |
| OH200LTR | ● | ● | | | ● | ●●● £1588 |
| OH200LTR-M | ● | ● | | ● | ● | ●●● £1588 |
| OH200LTX | ● | ● | ● | | | ●●● £1250 |
| OH200LTX-M | ● | ● | | ● | | ●●● £1353 |
| OH200LTXR | ● | ● | ● | | ● | ●●● £1663 |
| OH200LTXR-M | ● | ● | | ● | ● | ●●● £1760 |

*Installation Quotation subject to Site Survey. For details of Ceiling Track Options please contact your nearest Chiltern Invadex Office.
Note: Auxiliary output bullets must be specified for intended use. Please contact the Technical helpdesk for assistance.

Wispa 200 Series hoist configuration options

| code | Infra-red control | Manual turntable | Powered turntable | Manual X-Y | Powered X-Y | Powered X-Y to mono | Manual X-Y to mono | Powered Points |
|-------------|-------------------|------------------|-------------------|------------|-------------|---------------------|--------------------|----------------|
| OH200L | | ● | | ● | | | ● | |
| OH200L-M | | ● | ● | ● | | ● | ● | ● |
| OH200LT | | ● | | ● | | | ● | |
| OH200LTR | ● | ● | | ● | | | ● | |
| OH200LTR-M | ● | ● | ● | ● | | ● | ● | ● |
| OH200LTX | | | | | ● | | | |
| OH200LTX-M | | ● | ● | ● | | ● | ● | ● |
| OH200LTXR | ● | | | | ● | | | |
| OH200LTXR-M | ● | ● | ● | ● | | ● | ● | ● |





Wispa 300 Series hoist range Maximum Load 272kg (42 stones) (598lb)

- Controlled transfer from the bed, wheelchair or floor
- Simple recharge facility
- Dynamic yet safe
- Soft start/stop for smooth, controlled transfer
- Variable speed facility
- Tested to the durability section of British Standard 10535: 1998 with thousands of lift and lower tests

| code | Powered lift | Powered traverse | Auxiliary output 'X-Y' (cable) | Auxiliary output 'X-Y' (bullet) | Infra-red hand control | Price |
|-----------|--------------|------------------|--------------------------------|---------------------------------|------------------------|-----------|
| OH300L | ● | | | | | ●●● £1750 |
| OH300PT | ● | ● | | | | ●●● £1840 |
| OH300PTR | ● | ● | | | ● | ●●● £2260 |
| OH300P | ● | ● | ● | | | ●●● £1840 |
| OH300P-M | ● | ● | | ● | | ●●● £1942 |
| OH300PR | ● | ● | ● | | ● | ●●● £2260 |
| OH300PR-M | ● | ● | | ● | ● | ●●● £2300 |

*Installation Quotation subject to Site Survey. For details of Ceiling Track Options please contact your nearest Chiltern Invadex Office.
Note: Auxiliary output bullets must be specified for intended use. Please contact the Technical helpdesk for assistance.

SYMBOLS:
 Bulk/oversized item 
 Made to order (see P200) 

Tel: 0800 917 0399
www.chilterninvadex.co.uk


Fax: +44 (0) 1869 365588
sales@chilterninvadex.co.uk

OVERHEAD HOISTS

Wispa 300 Series hoist configuration options (Max Load 272kg (42 stones) (598lb))

| code | Infra-red control | Manual turntable | Powered turntable | Manual X-Y | Powered X-Y | Powered X-Y to mono | Manual X-Y to mono | Points |
|-----------|-------------------|------------------|-------------------|------------|-------------|---------------------|--------------------|--------|
| OH300L | | ● | | ● | | | ● | |
| OH300PT | | ● | | ● | | | ● | |
| OH300PTR | ● | ● | | ● | | | | ● |
| OH300P | | ● | | | ● | | | |
| OH300PR | ● | | | | ● | | | |
| OH300P-M | | ● | ● | ● | ● | ● | ● | ● |
| OH300PR-M | ● | ● | ● | ● | ● | | ● | ● |

Wispa 200/300 Series hoist range

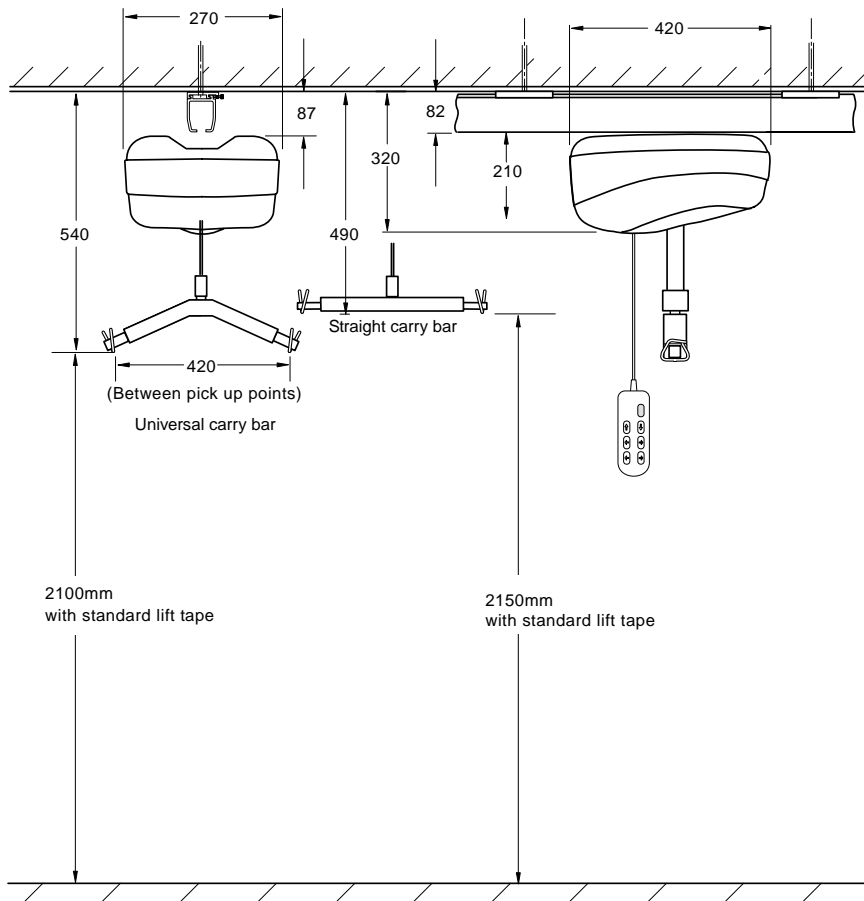

Notes:

- The saving on head clearance for universal carry bar versus straight carry bar is 50mm.
- Extended lifting tapes are available as an optional extra
- CAD Drawings of hoists available www.chilterninvadex.co.uk/architects
- Universal carry bar supplied as standard. A straight carry bar is available as an accessory.

SYMBOLS:

Bulk/oversized item



Made to order (see P200)



Tel: 0800 917 0399


www.chilterninvadex.co.uk

Fax: +44 (0) 1869 365588

sales@chilterninvadex.co.uk

OVERHEAD HOISTS


Wispa 100 Series hoist with X-Y Installation

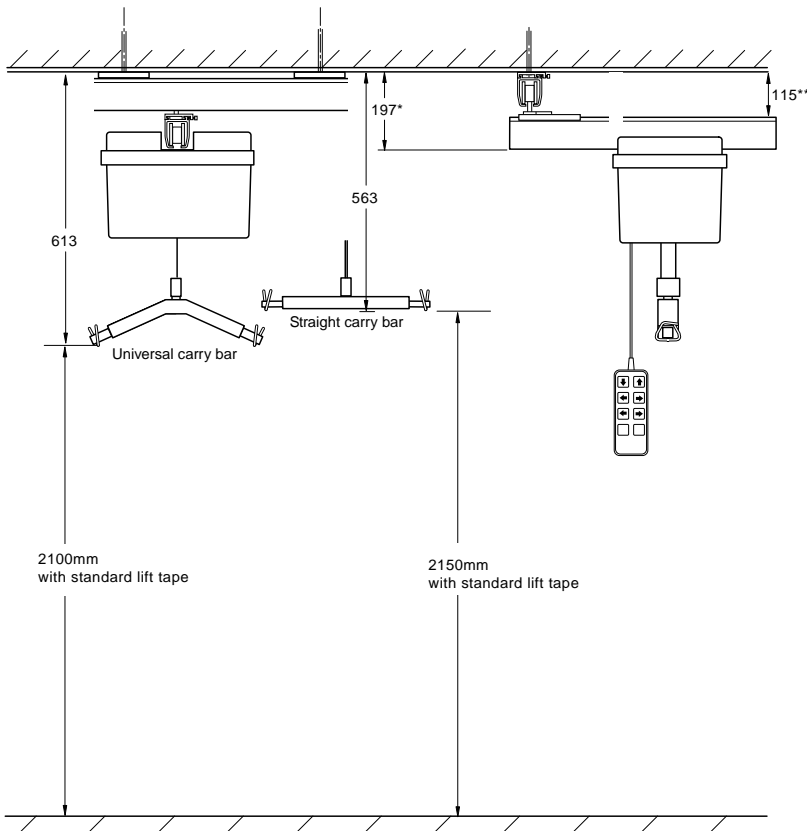

Notes:

- *103mm without the cover
- The 100 Series hoist carry bar can be lowered to a maximum of 2.1m. This is adjustable to suit site conditions
- The saving on head clearance for universal carry bar versus straight carry bar is 50mm
- Extended lifting tapes are available as an optional extra
- CAD Drawings of hoists available www.chilterninvadex.co.uk/architects
- Universal carry bar supplied as standard. A straight carry bar is available as an accessory.

X-Y systems (200/300 Series hoist with X-Y installation)

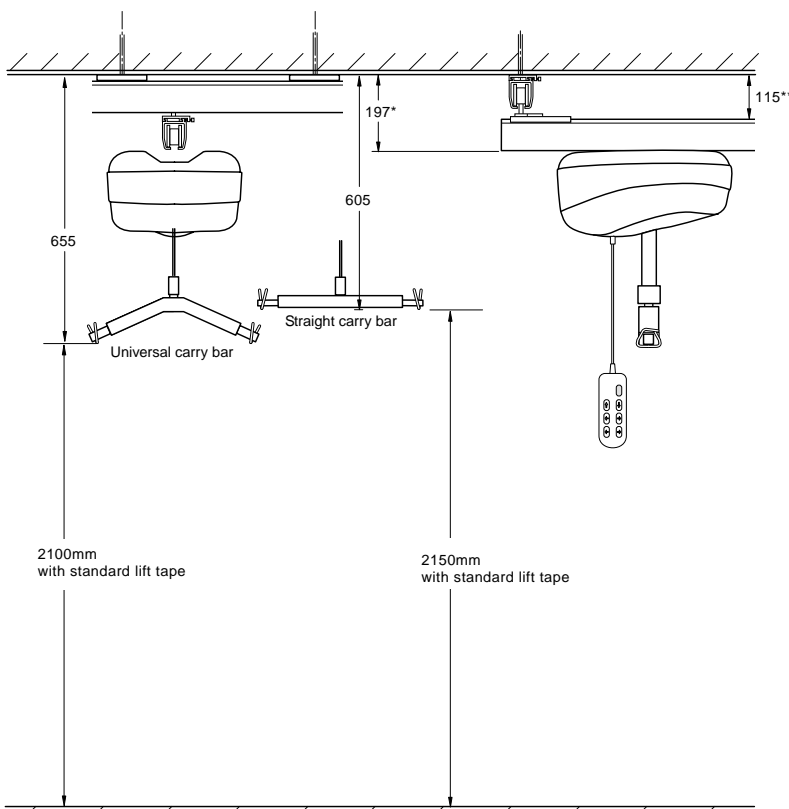

Notes:

- *282mm with piggyback
- ** Clearance for lights and smoke alarms
- The saving on head clearance for universal carry bar versus straight carry bar is 50mm
- Extended lifting tapes are available as an optional extra
- CAD Drawings of hoists available www.chilterninvadex.co.uk/architects
- Universal carry bar supplied as standard. A straight carry bar is available as an accessory.

SYMBOLS:

Bulk/oversized item



Made to order (see P200)



Tel: 0800 917 0399

www.chilterninvadex.co.uk

Fax: +44 (0) 1869 365588

sales@chilterninvadex.co.uk

OVERHEAD HOISTS



WispaLite Portable hoist Maximum Load 200kg (31 stones) (440lb)


- Can be used in conjunction with the LiteTrack freestanding portable gantry (see page 143) or a fixed ceiling track installation
- Easily transferred between different locations
- 2 year guarantee (conditions apply)
- Easy to carry using Integral carry handle and with fold up arms
- Soft start/stop for added control during transfer
- Operated via controls on the hoist cover or from the handset

| code | product | power | function | Price |
|-------|---------------------|-------------------|----------|-------|
| OHWPL | Wispa Lite Portable | Battery & Charger | Up/Down | £1150 |

WispaLite portable hoist configuration options

| code | Infra-red control | Manual turntable | Powered turntable | Manual X-Y | Powered X-Y | Powered X-Y to mono | Manual X-Y to mono | Points |
|-------|-------------------|------------------|-------------------|------------|-------------|---------------------|--------------------|--------|
| OHWPL | | ● | | ● | | ● | | |

Technical information

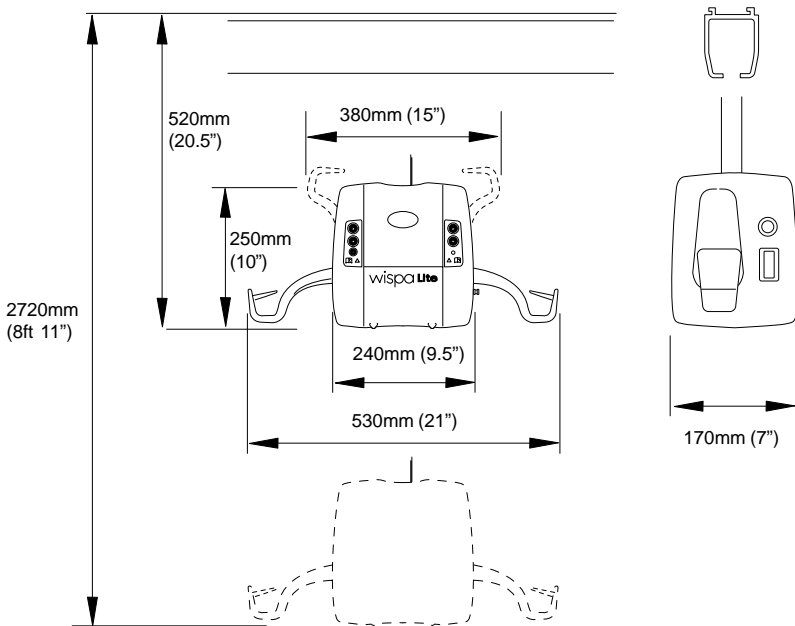

Notes:

- Maximum length of lifting tape is 2.2m
- CAD Drawings of hoists available www.chilterninvadex.co.uk/architects

SYMBOLS:

Bulk/oversized item



Made to order (see P200)



Tel: 0800 917 0399

www.chilterninvadex.co.uk

Fax: +44 (0) 1869 365588

sales@chilterninvadex.co.uk